

## DS-2CD2135FWD-I

### 3 MP Ultra-Low Light Outdoor Network Dome Camera

## H.265+

- Up to 3 MP High Resolution
- Full 2048 × 1536 @30 fps
- 2.8 mm / 4 mm / 6 mm / 8 mm Fixed Lens
- Options
- Ultra-Low Light, 0.008 lux, DarkFighter Technology
- H.265+, H.265, H.264+, H.264
- 120 dB Wide Dynamic Range
- 3D Digital Noise Reduction
- 12 VDC & PoE (802.3af)
- EXIR 2.0 with up to 100 ft (30 m) IR range
- MicroSD card slot supports up to 128 GB
- Wi-Fi, Optional
- IP67, IK10 Protection
- 3-Axis Adjustment




Available models:

DS-2CD2135FWD-I

Hikvision's DS-2CD2135FWD-I provides important new technology for any security application. The H.265+ codec assures savings in bandwidth and storage. The DarkFighter Ultra-Low Light technology allows for use in the most demanding lighting conditions. EXIR 2.0 technology enhances night time performance.

## Dimensions

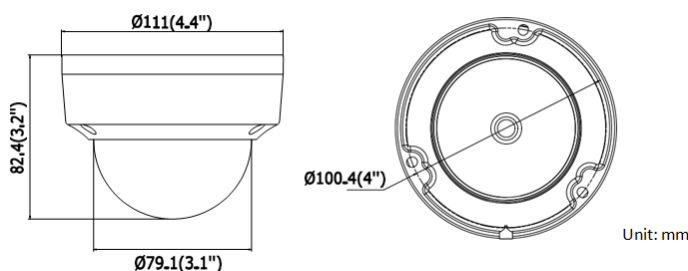

DS-2CD2135FWD-I	
<b>Camera</b>	
Image Sensor	1/2.8" Progressive Scan CMOS
Minimum Illumination	Color: 0.008 lux @(F1.6, AGC ON), 0 lux with IR
Shutter Time	1/3 s to 1/100,000 s
Slow Shutter	Supported
Lens	98° (2.8 mm), 78.7° (4 mm), 48° (6 mm), 37° (8 mm)
Lens Mount	M12
Iris	F1.6
3-Axis Adjustment	Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355°
Day and Night	IR Cut Filter
DNR	3D DNR
Wide Dynamic Range	120 dB
<b>Compression Standard</b>	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264; sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG; third stream: H.265+ / H.265 / H.264+ / H.264
H.264 Type	Main profile / high profile
H.264+	Support
H.265 Type	Main profile
H.265+	Support
Video Bit Rate	32 Kbps to 16 Mbps
<b>Image</b>	
Maximum Resolution	2048 × 1536
Main Stream	30 fps (2048 × 1536, 1920 × 1080, 1280 × 720)
Sub Stream	30 fps (640 × 360, 352 × 240)
Third Stream	30 fps (1280 × 720)
Image Enhancement	BLC / 3D DNR
Image Settings	Rotate mode supported. Brightness, contrast, saturation, and sharpness are adjustable via web browser and client software
ROI (Region of Interest)	Separate support for one fixed region in main and sub streams
Target Cropping	Supported
Day / Night Switch	Auto / scheduled
<b>Network</b>	
Network Storage	Support for microSD / SDHC / SDXC card (128G), local storage, NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, tampering alarm, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General Function	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
<b>Wi-Fi (-W)</b>	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz to 2.4835 GHz
Channel Bandwidth	20/40 MHz Support
Protocols	802.11b: CCK, QPSK, BPSK, 802.11g/n: OFDM
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transfer Rates	11b: 11 Mbps, 11g: 54 Mbps, 11n: up to 150 Mbps
Wireless Range	50 m (performance varies based on actual environment)
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
On-board Storage	Built-in microSD / SDHC / SDXC slot, up to 128 GB
<b>Smart Feature Set</b>	
Behavior Analysis	Line crossing detection, intrusion detection, unattended baggage detection, object removal detection
Line Crossing Detection	Cross a pre-defined virtual line, up to 1 pre-defined virtual line supported
Intrusion Detection	Enter and loiter in a pre-defined virtual region, up to 1 pre-defined virtual region supported
Object Removal Detection	Objects removed from a pre-defined region, such as exhibits on display
Unattended Baggage Detection	Objects left over in the pre-defined region such as baggage, purses, and dangerous materials
Recognition	Face detection
<b>General</b>	
Operating Conditions	-22° F to 140° F (-30° C to 60° C), Humidity 95% or less (non-condensing)
Power	12 VDC ± 25%, 5.5 W; PoE (802.3af, class 3), 7 W
IR Range	Up to 100 ft (30 m)
Protection Level	IP67, IK10
Dimensions	Camera: Ø 4.4" x 3.2" (Ø 111 x 82.4 mm)
Weight	1.1 lbs (500 g)

## Accessories

					
<b>PC110</b> Pendant mount	<b>CB110</b> Conduit base	<b>AB110</b> Angled base	<b>WM110</b> Wall mount	<b>SRS</b> Sun rain shield	<b>SRSM</b> Sun rain shield medium

