Snapshot and Email Setting
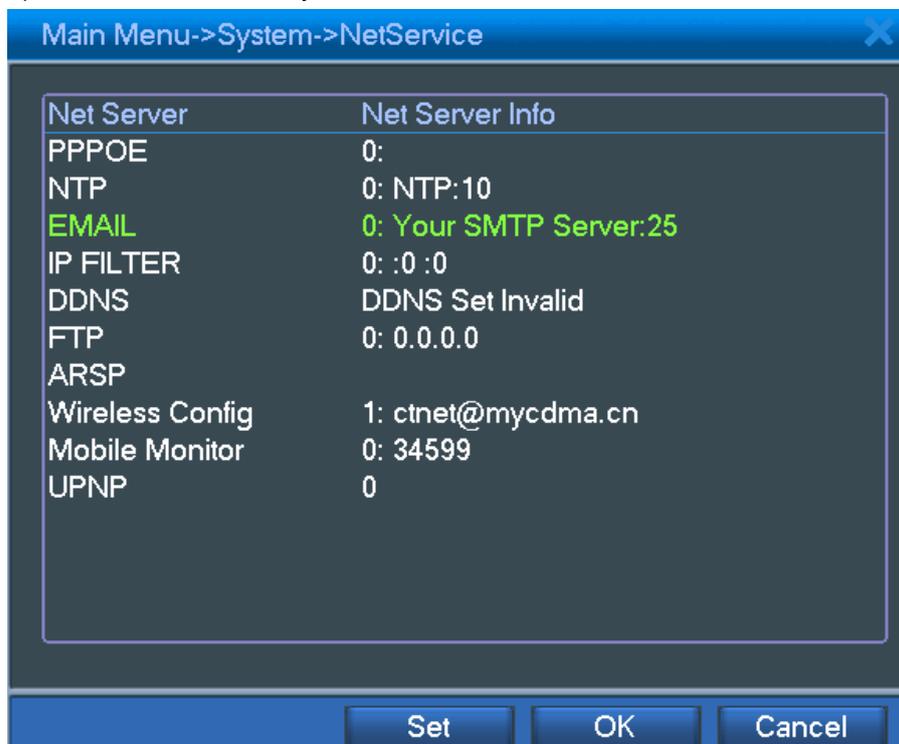
Snapshot and Email function are becoming very popular and useful in our life now,just like your assistant.For example,if you have installed cameras and dvr in your house ready,while some one is rushing into your house,then the dvr will send email to you with snapshot photos enclosed at same time when motion detect/video loss/video blind/alarm in,operstion steps are as below:

1.Email Setting.

1) Go to Main Menu->System->NetService to double click "EMAIL",see below picture:

2) To write the EMAIL settings,for example gmail,see below picture:

Main Menu->System->NetService->EMAIL

Enable ☑
SMTP Server smtp.gmail.com
Port 465
Need SSL ☑
User Name 666666
Password ●●●●●●
Sender 666666@gmail.com
Receiver 666666@gmail.com
Title Alarm Message

OK   Cancel

Pls note: Email sender and receiver are the same one.

2.FTP setting.

Main Menu->System->NetService->FTP

Enable ☑
Server IP 10 . 6 . 1 . 14
Port 21
User Name 666666
Password ●●●●●●   ☐ Anonymous
Max File Length 128 M
DirName Snapshot&Record
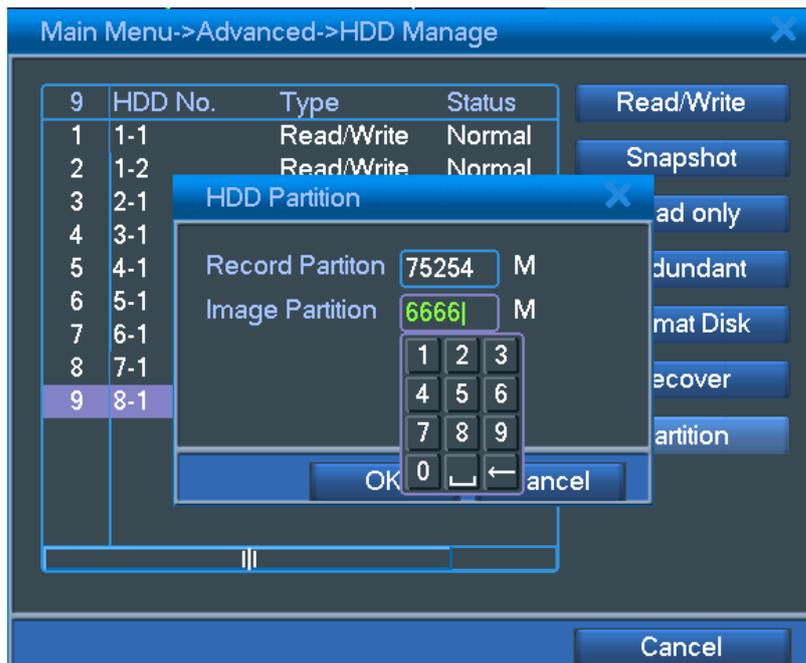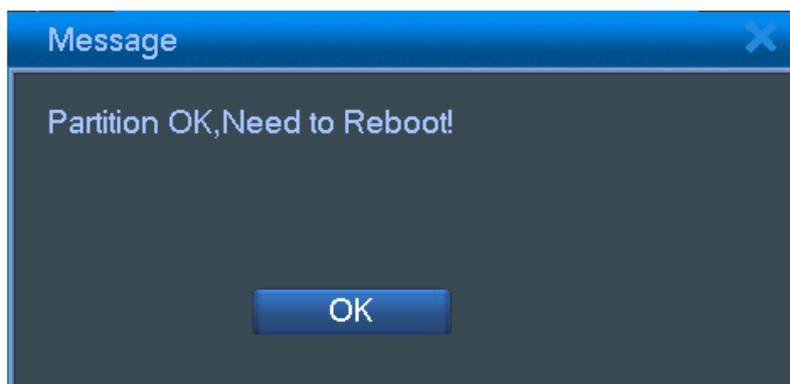
OK   Cancel

3.Hard drive partition.

1)Go to Main Menu->Advanced->HDD Manage,click "partition" and write partition value for snapshot,then click "OK",see below pictures:
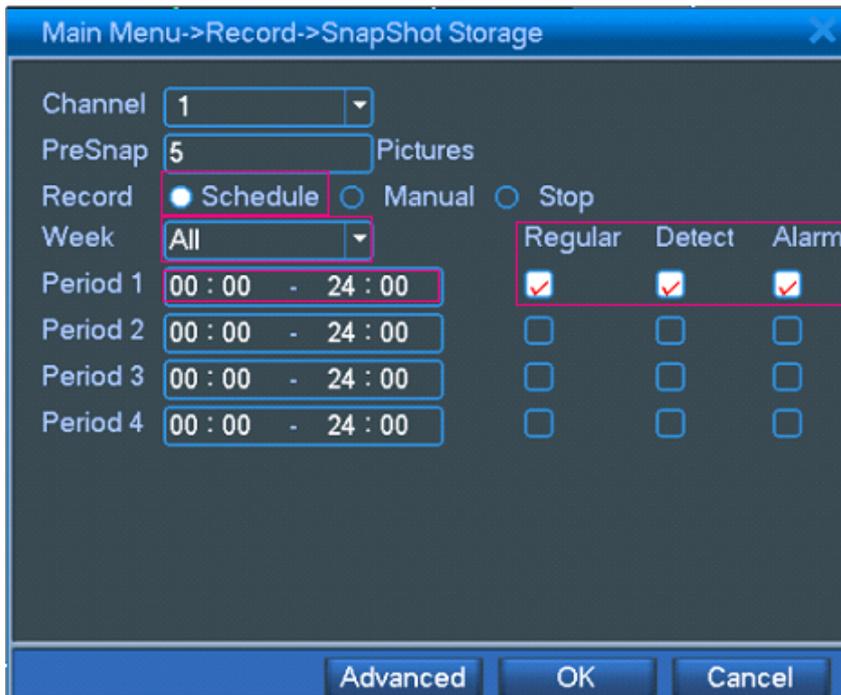
Main Menu->Advanced->HDD Manage

9	HDD No.	Type	Status	Read/Write
1	1-1	Read/Write	Normal	Snapshot
2	1-2	Read/Write	Normal	
3	2-1	HDD Partition		ad only
4	3-1			dundant
5	4-1	Record Partiton 75254 M		mat Disk
6	5-1	Image Partition 6666 M		
7	6-1			ecover
8	7-1			artition
9	8-1			

OK   ancel

Cancel

2)After partition,click "OK" to reboot,see below picture:

Message

Partition OK,Need to Reboot!

OK
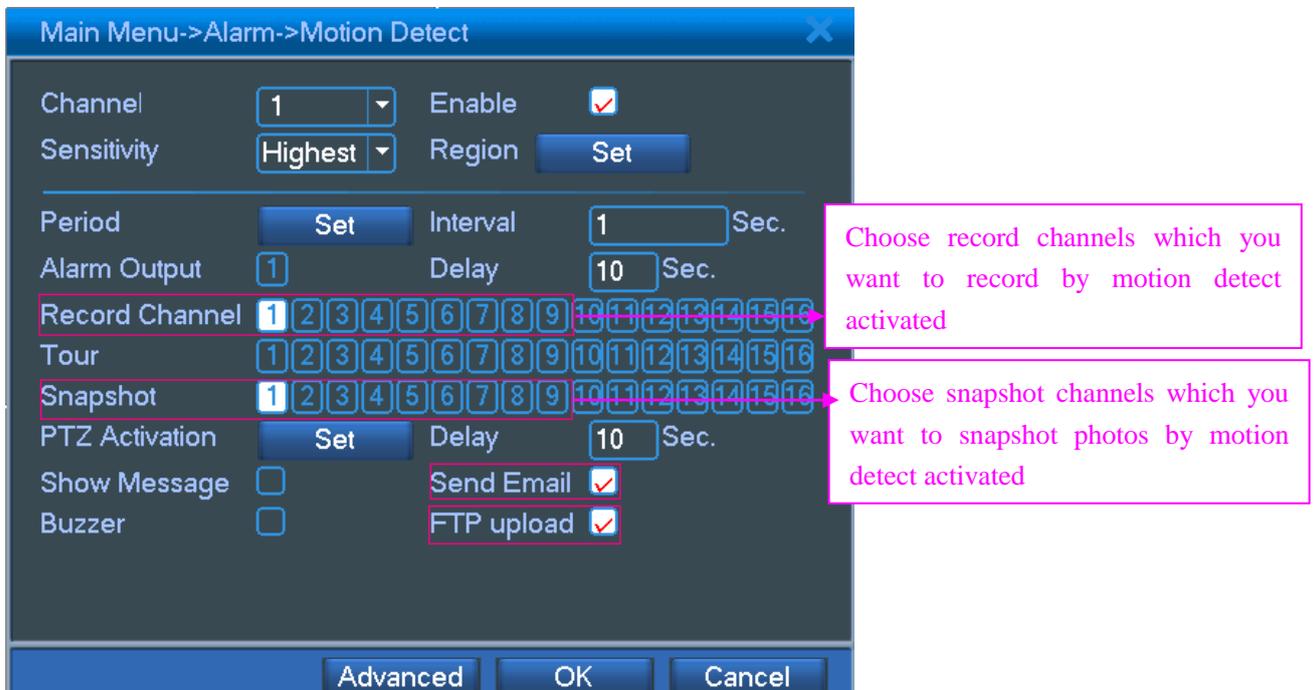
4.Snapshot Storage.

Go to Main Menu->Record->Snapshot Storage, select "Record->Schedule","Week->All" and "Period 1->00:00-24:00",then click "OK" see below picture:

5.Motition Detect.

Go to Main Menu->Alarm->Motion Detect,select "Enable","Snapshot" and "Send Email",then click "OK",see below picture:

Choose record channels which you want to record by motion detect activated

Choose snapshot channels which you want to snapshot photos by motion detect activated

Video Loss,Video Blind and Alarm In are also the same operation as Motion Detect.

After finishing all above operations,pls go to make some motion detect,video loss,video blind or alarm in,then you will receive emails with snapshot photos enclosed finally,also in FTP server,you will receive record files and snapshot photos.

Pls note,if it's first time you set email,snapshot and FTP on DVR,the dvr will takes some seconds to send email to you or send record file and snapshot photos to FTP server.